

A 1 DOF State Controllable & Driving Shared Solution for Building a Hyper-Redundant Chain Robot

KeJun Ning and Florentin Wörgötter

Abstract—This paper puts forward a novel design solution for building a 3D hyper-redundant chain robot (HRCR) system, consisting of linked, identical modules and one base module. All the joints of this HRCR are passive and state controllable, and share one common driving input, no matter how many degrees of freedom (DOF) are implemented using different numbers of modules. The prototype developed here, named *3D-Trunk*, is used as a proof of concept. We will present here its concept, mechanical and embedded controller design and the implementation.

I. INTRODUCTION

The study on hyper-redundant chain robot (HRCR) systems is always an important field, because such robots offer many independent degrees of freedom (DOF). Elephant trunk robots, snake robots, serpentine robots, etc, are all representative cases [1-19, etc]. The related literature is substantial, and many groups exist who build different HRCRs pursuing theoretical and application driven research.

The most popular approach to build a hyper-redundant robot is by connecting several rigid links via an actuated revolute joint in a chain. Another popular design approach utilizes parallel mechanisms to connect several links together [1-3]. Designing a highly maneuverable and strong, yet compact, robotic joint is the main mechanical design challenge for constructing hyper-redundant robots [4]. A good review of the prior work had been presented in [4]. Some of recent and representative works are presented in [5-11]. There exist some other interesting HRCRs, which present different mechanical solutions [12-17].

Sujan et al developed a lightweight hyper-redundant binary device BRAID [12], based on embedded muscle type binary actuators and flexure linkages.

Paap et al used cylindric rubber pieces to construct snake robot joints [13]. There were four motors mounted in a segment, and these motors were used to wind and unwind wires to compress cylindric rubber pieces in different directions for rotation.

Manuscript received February 18, 2009. The work was supported by PACO_PLUS from the European Commission.

KeJun Ning is currently a Post Doctoral researcher in the Bernstein Center for Computational Neuroscience, University of Goettingen, Bunsenstrasse. 10, 37073 Goettingen, Germany (e-mail: ning@bccn-goettingen.de , nkj@sjtu.org).

Florentin Wörgötter is with the Bernstein Center for Computational Neuroscience, University of Goettingen, Bunsenstrasse. 10, 37073 Goettingen, Germany (phone: +49 (0)551 5176528; FAX: +49 (0)551 5176449; e-mail: worgott@bccn-goettingen.de).

Ananiev et al present a new method for driving a hyper-redundant robot [14]. Their method comprises a flexible shaft, which transports the rotation from only one irreversible motor to the mechanisms inside all multiple modules of the robot by means of several clutches to distribute selectively the torque/rotation of the motor independently to any of the robot modules [14].

Clemson University developed an elephant trunk robot [15]. Of the possible 32-DOF, the hybrid cable and spring servo system creates a manipulator with 8-DOF that are user controllable and 24-DOF that are coupled to the controllable DOFs [15].

Ohno and Hirose presented a slime robot, which is constituted of many slime robot modules [16]. Each module is a 3-DOF pneumatic module with pneumatic actuators, valves, sensors and a microprocessor in its body.

The Autonomous Systems Laboratory of EPFL presents the development of a bio-mimetic spine for the humanoid robot, Robota [17]. This spine is composed of four vertebrae parts, linked through spherical bearings. There are distributed hydraulic pumps and springs to drive these vertebrae parts and bend the spine.

In this paper, we present a novel concept for building a HRCR, which consists of passive and state controllable joints, and shares a common driving input. The remainder of this article is organized as follows. In Section 2, the concept is presented. The original prototype design and some implementation issues are described in detail in Section 3. Section 4 describes the distributed control architecture of our prototype, and some issues related to electronics. A feasibility experiment result of our primary 3D-Trunk prototype is presented in Section 5. Finally, conclusions and application potential are presented in Section 6.

II. CONCEPT OF THE NOVEL HYPER-REDUNDANT CHAIN ROBOT

A. Passive Joint With State Control

Figure 1(a) shows a general 3D hyper-redundant chain mechanism schematics described in this paper. It consists of a set of links serially connected by passive revolute joints in a chain. Each revolute joint has 1 DOF. The angle between two neighboring joint axes is arbitrary.

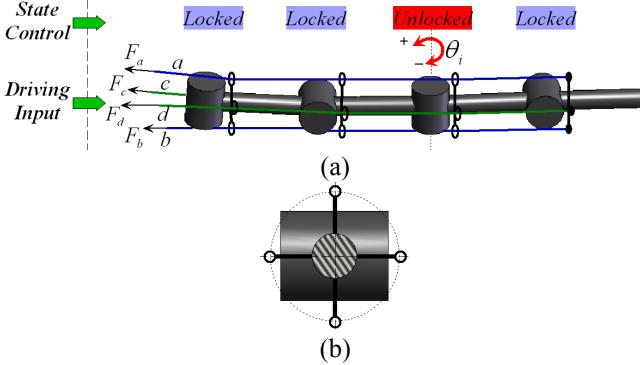


Fig. 1. A 3D hyper-redundant serial-link mechanism schematics. All the revolute joints are passive and with binary-state control. They can only be in locked and unlocked states.

There are two pairs of driving-wires (*a* and *b*, *c* and *d*) drive this hyper-redundant serial kinematic chain. As shown in Fig.1(b), there are four “rings” symmetrically distributed and fixed in each link. These rings are used for turning and to guide the wires. Two opposite rings are coplanar with the joint’s axis; and the other two are perpendicular to them. These rings are located very close to the joint. As shown in Fig.1 (a), two pairs of wires are routed along the chain via many such rings.

If we locked some of the revolute joints, then the locked joints would not be rotatable and the DOF of the whole chain had essentially degenerated. In the case shown in Fig.1 (a), only joint *i* is in the unlocked state, external force or torque will rotate it.

With this concept, we can control any one joint’s motion step by step, then, by altering the loading configuration change the whole chain’s shape according to our expectation.

B. DOF State Controllable & Driving Shared

Recently some novel wire-driven robots had been reported [e.g., 20-25], with some advantages. In this study, wire-driven is also an easy and effective approach to drive our passive hyper-redundant serial kinematic chain. All the passive joints of the whole chain share the driving effect introduced by wires. All driving-wires need to be in a taut status, because wires can only impose unidirectional constraints.

For this kind of HRCR, every unlocked joint is differentially driven by a pair of wires. Driving these wires by windlasses is an easy and suitable approach. In the situation shown in Fig.1 (a), only joint *i* is unlocked, the wires’ traction will not affect the locked joints. If wire *c* is wound and wire *d* is unwound, joint *i* will rotate positively, and vice versa. The pulling caused by wire *a* and *b* will not have any effect on joint *i*, due to the torque they generate which is perpendicular to the axis of joint *i*. So, for joint *i*, wire *c* and *d* are its effective pair of wires.

Based on this concept we could make all passive links lighter, equipping the joint with a strong binary-state locking mechanism. Using a powerful wire driven base segment, the whole chain robot, thus, is lighter and much stronger than

many conventional architectures, offering wider application fields.

III. 3D-TRUNK, A DESIGN PARADIGM BASED ON THIS CONCEPT

A. Introduction of 3D-Trunk’s Mechanical Design

Figure 2 shows our original prototype system called “3D-Trunk”. All electronics components and micro-controllers were embedded inside.

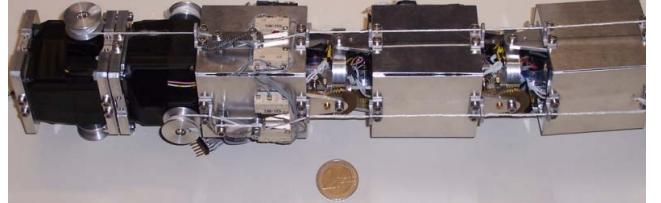


Fig. 2. The original 3D-Trunk prototype.

Figure 3 shows some key implementation details of 3D-Trunk. Based on the segments’ function partition, the chain comprises a “Base_Unit” and many identical modularized “Cube & Joint” segments. The Base_Unit is the power segment of the whole chain, for housing four reduced DC-motors and motor control boards, as well as providing the interface components for mechanical mounting to some other structures.

As shown in Fig.3, in the Cube & Joint Segments, the same Cubes and Joints components are linked with each other. The Cubes are used for positioning the joints, housing

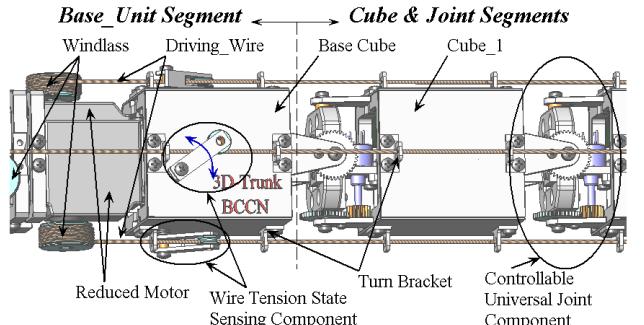


Fig. 3. Partial enlarged drawing of 3D-Trunk. The chain comprises a Base_Unit, many identical modularized Cubes and Controllable Universal Joint Components.

distributed electronics boards, and routing cables inside. They are the presentational segments of our HRCR. There are four Windlasses, actuated by the four DC Reduced Motors, driving the four Driving_Wires.


For the original prototype, these reduced motors were reconfigured starting from off-the-shelf servos. We removed their original circuits and spacer pins, just left the gears, motor and housing parts and drive them now by the new circuit boards we developed. In this way, we can achieve better and more suitable actuation performance.

As shown in Fig.3, there are some Turn Brackets mounted outside of the cubes (Base Cube, Cube_1,..., Cube_n). They work as simplified pulleys for positioning and guiding the


Driving_Wires (same function as the rings shown in Fig. 1(a)).

As shown in Fig.3, there are four Wire Tension State Sensing Components (WTSSC) symmetrically distributed on the four outer faces of the Base Cube. Each Driving_Wire is routed along a small pulley inside of one WTSSC. Each WTSSC is pulled by a spring, and triggers a pair of micro-switches at the respective and predetermined positions. In this way, we can acquire all tensile state of the four Driving_Wires by these WTSSCs in real time.

Figure 4 (a) exhibits a more detailed rendering of the inner mechanism of the Cube and Joint component. As mentioned in Section 1, for constructing practical hyper-redundant robots, the joint is the main mechanical design challenge. For

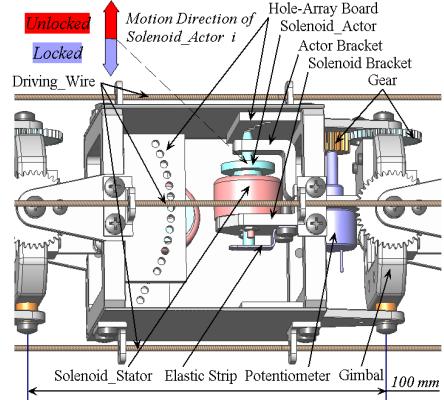

(a) The inner mechanism of the Cube and Joint.

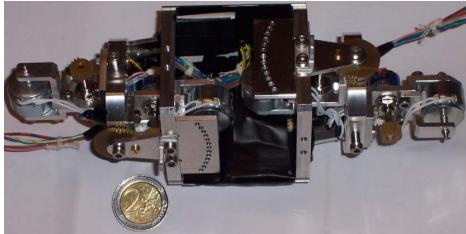

(b) The completed Cube and Joint.

Fig. 4. Explanation of 3D-Trunk's mechanical design.

our requirements, a strong enough binary-state locking component is the key for implementing our new concepts. Fig.4 discloses our solution for constructing an effective and compact “clutch” for this new conceptual HRCR.

B. Design of 3D-Trunk's Controllable Universal Joint Component

Generally speaking, a clutch is a suitable device to control the revolute joint's binary-state (locked and unlocked). But off-the-shelf products are not suitable for our requirements. For building a chain-like robot, we have to consider tradeoffs between many issues [4].

We designed a different compact locking-clutch for 3D-trunk. This design achieves much higher locking torque in a very compact and light implementation, and it provides joint angle feedback information.

The device called “Controllable Universal Joint Component” (CUJC) shown in Fig. 3, is a special and compact component designed for 3D-Trunk. It contains a

Gimbal in Fig. 4 (a), whose two perpendicular axes coincide at each joint. Some key parts of this design are mounted on the Gimbal. One CUJC is used to bridge two neighboring Cubes to provide 2-way independent clutches, and to house 2-way joint angle sensors.

As shown in Fig. 4, a linear solenoid (pull type) driving mechanism was employed to construct a practical and compact binary-state clutch for 3D-trunk. Linear solenoids are ideal for high force, short stroke applications.

In Fig. 4 (a), the Solenoid_Stator encapsulates coil and sliding bearing, mounted on the Solenoid_Bracket. The Solenoid_Actor is the moveable iron core, acting as a moving “pin”. The Hole-Array Board provides arrayed holes to plug into. They are the key parts of the controllable binary-state locking mechanism of this design. The Solenoid_Actor has a pointy tip for easy plugging into the holes distributed in the Hole-Array Board.

For each Hole-Array Board, the holes are circularly and evenly distributed. The angle space between two neighboring holes depends on the diameter of the “pin”, the radius of the hole-array, strength of material, components' size constraints, etc. For our original prototype, one joint's working range is from -27° to $+27^\circ$, with 4.5° resolution.

In Fig.4 (a), if the solenoid is not powered, the Elastic Strip will push the Solenoid_Actor into a plug. If it is just coaxial with a hole in the Hole-Array Board, then the plugging action will be successful. If there is no hole in the right place, the joint will continue to move till a neighboring hole is met allowing to lock.

In this design, pull type linear solenoids were employed, and the joint's locked state is identical with solenoid's unpowered state. In this way, power consumption of the whole HRCR is reduced greatly.

As show in Fig.4 (a), if the solenoid is powered, the Solenoid_Stator will pull the Solenoid_Actor by an electro-magnetic force. If this effect is strong enough, the Solenoid_Actor will be unplugged from the Hole-Array Board. The Actor_Bracket is used for positioning the Solenoid_Actor (together with the sliding bearing of Solenoid_Stator) and enhancing the locking stiffness of CUJC.

In order to increase the reliability of such locking action, the Elastic Strip should be stiffer. Sequentially, the solenoid needs to offer enough pulling force to against the elasticity of Elastic Strip and the sliding friction between its stator and actor.

For increasing the maximum pulling force, a pulse-width modulation (PWM) controlled current is used to power the solenoid. By powering the solenoid with higher voltage and low duty cycle, we can obtain much higher pull force and the solenoid will not burn out.

As shown in Fig.4 (a), this solution can also provide joint angle feedback information. A potentiometer is used to sense a joint's absolute angle. A pair of gears is employed to transmit motion. As the bigger gear is fixed to the cube, the obtained reduction ratio increases the potentiometer's

effective resolution. Small plastic conductive potentiometers were employed in our prototype, for getting low electrical noise, high linearity and long life. The angle feedback is not only used to measure a joint's real rotation, but also to deduce plugging positions or check the result of a locking (plugging) action.

This type of “clutch” implementation is compact and can achieve much higher locking torque than a friction based approach, because the available shearing force between “pin” and “hole” is much stronger.

This solution, however, also has some disadvantages. The pin's plugging and unplugging actions are relatively slow and the locking angle steps of each joint are discrete and predetermined.

IV. CONTROLLER ARCHITECTURE OF 3D-TRUNK

A distributed control architecture is a suitable approach for the HRCR. Fig. 5 shows a distributed control architecture scheme for such HRCR. For 3D-Trunk, all power, driving cables and communication twisted pairs were routed along and inside the Cubes. The communication between the master and the distributed slave control systems are via a RS-485 serial bus. An RS-485 serial bus was employed because of its high immunity to noise and ability to drive large distances with high data rates. Solenoids are powered by PWM current, and each peak current is about 1.6A. Thus, they could be stronger interference sources. Since the RS-485 is differential, however, it resists electromagnetic interference from distributed solenoids and driving cables.

We developed specific embedded control boards for 3D-Trunk. These modularized boards are distributed only in some Cubes of the whole HRCR. A set of distributed slave control modules consists of a controller board and a MOSFET-array board. Such a separate design is for reducing interference and for better housing them in their Cubes.

The distributed slave control modules are based on an ATMEGA16 micro-controller (AVR core, from ATMEL). For the distributed slave control modules, the internal peripheral Timer/Counters of ATMEGA16 generate the PWM signals (for the solenoids), and the programmable I/O ports drive MOSFET-array boards for actuating the solenoids.

The motor control boards were encased in the Base Cube (see Fig. 3). As shown in Fig. 5, they share the communication bus (RS-485), gather WTSSCs' outputs, and drive the four motors.

The developed communication protocol is simple as it just transfers commands and data between the distributed controllers (identified by the exclusive addresses), and coordinates the behavior of the distributed locking mechanisms and the four motors, etc. Because the RS-485 is a half-duplex bus it avoids transfer conflicts and this has been considered in the related firmware code.

This controller architecture, as shown in Fig. 5, is open and extendable. We can access and operate the whole HRCR by connecting a supervisory level controller. The supervisory

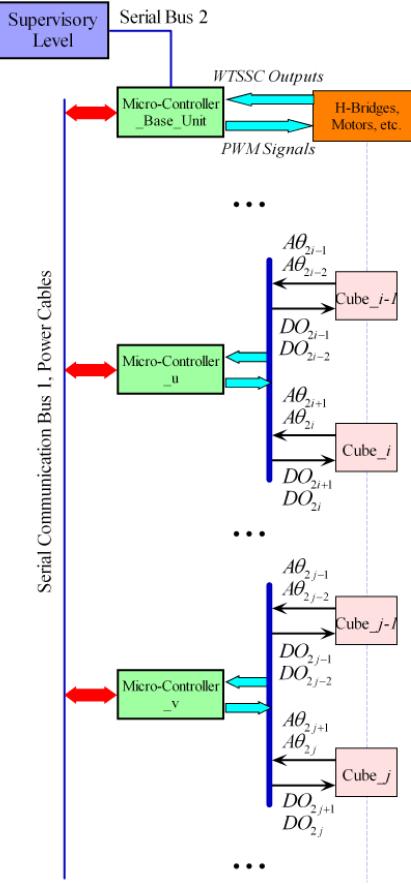


Fig. 5. A distributed control architecture scheme for such HRCR.

level controller could be a PC or embedded system, depending on the actual application. At present, we access and control 3D-Trunk's inner resources and status by an RS-232 port of a PC. As the ATMEGA16 has only one hardware UART (Universal Asynchronous Receiver Transmitter), an extended, software-driven UART was independently implemented by us. This architecture design shown in Fig.5 facilitates debugging and possible future extensions.

So far, it is clear, that the computational burden of the distributed controllers is low. In other words, such a robot offers a very high potential for extensions. We can mount various sensors and mechanical effectors, and port their signals to the remaining controller resources for further research and application works.

V. EXPERIMENT

A feasibility demonstration result of our primary 3D-Trunk prototype (4-DOF) is shown in Fig. 6, with 6 snapshots, taken during the experiment. More modularized Cubes are currently being built and assembled.

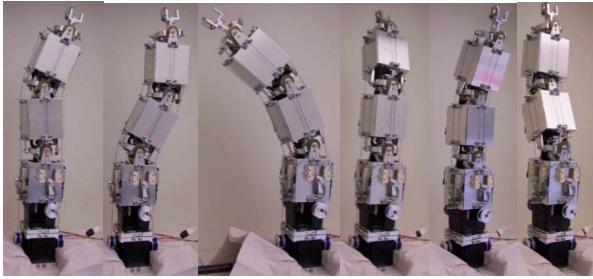


Fig. 6. The minimum 3D-Trunk prototype performing in 3D, snapshot from a demo video.

The experiments also disclosed some problems. The present controllable binary-state locking mechanism has exhibited reliable performance and high-load resistance. By contrast, at present, the employed four driving motors are too weak for this system. The Turn Bracket design shown in Fig. 3 and Fig. 4 is too simple and we get rather large friction during an intensely bended pose. The friction between these Turn Brackets and the Driving_Wires shortens the lifetime of the Driving_Wires, and reduces the effective driving power from the driving motors. Neither of these problems, however, is fundamental and they can be resolved by small changes in a redesign.

VI. CONCLUSIONS AND APPLICATION POTENTIAL

In this paper, we presented a novel design concept for building a 3D HRCR. The implemented prototype system “3D-Trunk” is used as a development paradigm for introducing more details. At present, our original prototype design and experiments could verify the novel concepts presented in this paper in a satisfactory way.

The main drawback of such robot is its long action cycle, for the all passive joints sharing the common driving input. We have to operate these joints one by one. Thus, any redesign needs to focus on speeding up these processes. On the other hand, the much lighter weight resulting from this concept of building an HRCR offers a valuable advantage for a wide range of applications.

In principle we can build different kinds of elephant trunk robots, snake robots, new multiple-DOF pan-tilts, etc, based on this concept. Equipped with cameras, such a chain robot on a mobile platform is capable of inspection and surveillance.

Furthermore the system might possess of some potential for industrial application, for example, building shape-changeable manipulators or positioners. The principles shown here should be transferable to the robustness requirements of industry without too many problems.

ACKNOWLEDGEMENT

We would like to thank our university’s machine workshop for their nice manufacturing work.

REFERENCES

- [1] G. S. Chirikjian and J. Burdick, “Kinematically optimal hyper-redundant manipulator configurations,” *IEEE Trans. Robotics and Automation*, vol. 11, pp. 794-806, Dec. 1995.
- [2] G. S. Chirikjian, and J. W. Burdick, “A hyper-redundant manipulator,” *IEEE Robotics and Automation Magazine*, vol. 1, pp. 22-29, Dec. 1994.
- [3] G. S. Chirikjian, and J. W. Burdick, “Design and experiments with a 30 DOF robot,” in *Proc. 1993 IEEE Int. Conf. Robotics and Automation*, Atlanta, vol. 3, pp. 113-119.
- [4] E. Shamma, A. Wolf, and H. Choset, “Three degrees-of-freedom joint for spatial hyper-redundant robots,” *Mechanism and Machine Theory*, vol. 41, pp. 170-190, Feb. 2006.
- [5] A. Wolf, H. B. Brown, R. Casciola, A. Costa, M. Schwerin, E. Shamma, and H. Choset, “A Mobile Hyper Redundant Mechanism for Search and Rescue Tasks,” in *Proc. 2003 IEEE/RSJ Int. Conf. Intelligent Robots and Systems*, Las Vegas, pp. 2889-2895.
- [6] C. Wright, A. Johnson, A. Peck, Z. McCord, A. Naaktgeboren, P. Gianfortoni, M. Gonzalez-Rivero, R. Hatton, and H. Choset, “Design of a Modular Snake Robot,” in *Proc. 2007 IEEE/RSJ Int. Conf. Intelligent Robots and Systems*, San Diego, pp. 2609-2614.
- [7] H. Ikeda, and N. Takanashi, “Joint assembly movable like a human arm,” U.S. Patent 4683406, July 1987.
- [8] E. Shamma, A. Wolf, H. B. Brown Jr., and H. Choset, “New Joint Design for Three-dimensional Hyper Redundant Robots,” in *Proc. 2003 IEEE/RSJ Int. Conf. Intelligent Robots and Systems*, Las Vegas, pp. 3594-3599.
- [9] G. Long, J. Anderson, and J. Borenstein, “The kinematic design of the OmniPede: a new approach to obstacle traversal,” in *Proc. ICRA ’02 IEEE Int. Conf. Robotics and Automation*, pp. 714-719, 2002.
- [10] G. Granosik, and J. Borenstein, “Integrated joint actuator for serpentine robots,” *IEEE/ASME Trans. Mechatronics*, vol. 10, no.5, pp. 473-481, Oct. 2005.
- [11] G. Granosik, M. G. Hansen, and J. Borenstein, “The OmniTread Serpentine Robot for Industrial Inspection and Surveillance,” *Int. J. Industrial Robots, Special Issue on Mobile Robots*, vol. IR32-2, pp. 139-148, Mar. 2005.
- [12] V. A. Sujan, M. D. Licher, and S. Dubowsky, “Lightweight Hyper-redundant Binary Elements for Planetary Exploration Robots,” in *Proc. 2001 IEEE/ASME Int. Conf. Advanced Mechatronics*, Como, pp. 1273-1278.
- [13] K. L. Paap, M. Dehlwisch, and B. Klassen, “GMD-Snake: A Semi-Autonomous Snake-like Robot,” in *Proc. 3rd Int. Symp. Distributed Autonomous Robotic Systems*, Saitama, 1996.
- [14] A. Ananiev, I. Kalaykov, E. Petrov, and B. Hadjiyski, “Single-motor driven construction of hyper-redundant robot,” in *Proc. 2004 IEEE/ASME Int. Conf. Mechatronics and Robotics*, Aachen, pp. 549-553.
- [15] I. D. Walker, and M. W. Hannan, “A Novel ‘Elephant’s Trunk’ Robot,” in *Proc. 1999 IEEE/ASME Int. Conf. Advanced Intelligent Mechatronics*, Atlanta, pp. 410-415.
- [16] H. Ohno and S. Hirose, “Study on slime robot,” in *Proc. 2000 IEEE/RSJ Int. Conf. Intelligent Robots and Systems*, vol.3, pp.2218-2223.
- [17] L. Roos, F. Guenter, A. Guignard and A. G. Billard, “Design of a Biomimetic Spine for the Humanoid Robot Robota,” in *Proc. 2006 IEEE / RAS-EMBS Int. Conf. Biomedical Robotics and Biomechatronics*, Pisa.
- [18] J. Conradt, and P. Varshavskaya, “Distributed Central Pattern Generator Control for a Serpentine Robot,” in *Proc. Int. Conf. Artificial Neural Networks*, pp. 338-341, Istanbul, 2003.
- [19] H. Yamada, S. Chigasaki, M. Mori, K. Takita, K. Ogami, and S. Hirose, “Development of amphibious snake-like robot ACM-R5,” in *Proc. 36th Int. Symp. Robotics*, pp. 433-440, 2005.
- [20] K. J. Ning, M. Y. Zhao, and J. Liu, “A New Wire-Driven Three Degree-of-Freedom Parallel Manipulator,” *ASME Trans. J. Manufacturing Science and Engineering*, vol. 128, pp. 816-819, Aug. 2006.
- [21] K. J. Ning, “Research and Develop of a New Type Wire Driven Parallel Robot System,” M.S. thesis, Northeastern University, Shenyang, People’s Republic of China, 2002.
- [22] S. Kawamura, W. Choe, S. Tanaka, and S. R. Pandian, “Development of an Ultrahigh Speed Robot FALCON using Wire Drive System,” in

- Proc. 1995 IEEE Int. Conf. Robotics and Automation*, Piscataway, pp. 215-220.
- [23] K. Maeda, S. Tadokoro, T. Takamori, M. Hiller, and R. Verhoeven, "On Design of a Redundant Wire-Driven Parallel Robot WARP Manipulator," in *Proc. 1999 IEEE Int. Conf. Robotics and Automation*, Detroit, vol. 2, pp. 895-900.
- [24] J. S. Albus, R. Bostelman, and N.G. Dagalakis, "The NIST ROBOCRANE," *J. Robotic Systems*, vol. 10, no. 5, pp. 709-724, 1993.
- [25] T. Maier, and C. Woernle, "Flatness-Based Control of Underconstrained Cable Suspension Manipulator," in *Proc. DETC'99 ASME Design Eng. Tech. Conf.*, Las Vegas, pp. 1-10, 1999.
-

Corresponding author:

Prof. Dr. Florentin Woergoetter
 Bernstein Center for Computational Neuroscience (BCCN)
 University of Goettingen
 Bunsenstr. 10 (at the MPI)
 D-37073 Goettingen
 Germany
 Phone: +49 (0)551 5176528
 FAX: +49 (0)551 5176449
 Email: worgott@bccn-goettingen.de

Dr. KeJun Ning
 Bernstein Center for Computational Neuroscience (BCCN)
 University of Goettingen
 Bunsenstrasse 10 (at the MPI)
 D-37073 Goettingen
 Germany
 Email: ning@bccn-goettingen.de , nkj@sjtu.org